

Smart Pivot M5



Installation Instructions

- Semi Frameless
- Reversible
- Patch Fittings
- 6mm Clear Safety Glass
- Magnetic Door Seal
- Standard height 1830mm
- 200mm height available upon request



Available to suit the following base size:

M5 790 (To suit 820mm Base)
Front width adjusts: 730 – 790mm
White I/N: 4890301 Silver I/N: 4890302

M5 890 (To suit 900mm Base)
Front width adjusts: 830 – 890mm
White I/N: 5137325 Silver I/N: 5137333

M5 990 (To suit 1000mm Base)
Front width adjusts: 930 – 990mm
White I/N: 4890303 Silver I/N: 4890304

M5 1180 (To suit 1200mm Base)
Front width adjusts: 1120 – 1180mm
White I/N: 5137676 Silver I/N: 5137684

M5 1480 (To suit 1500mm Base)
Front width adjusts: 1420 – 1480mm
White I/N: 4890585 Silver I/N: 489058

IMPORTANT TO READ BEFORE INSTALLING

Please inspect this product for damage, manufacturing fault or missing parts prior to commencing the process of installation, no warranty will be applied after installation has begun.

Prior to installation, please ensure there are no pipes or cables hidden in the wall where you intend to drill.

All of our Shower Screens must be handled with extreme care as glass is fragile and can shatter if handled incorrectly. Glass is not covered by warranty. You will notice through-out the installation process that the corners of any glass that is frameless or semi frameless have a protective cover. Please try to leave these protective covers on any panels that have them until after you have moved panels into position. Throughout the entire installation process please ensure that the washers and grommets supplied are inserted correctly so that metal and glass do not make contact. Failure to do so will void warranty and may cause glass to break.

Flat packed DIY shower screens are heavy and may require two people to install.


Please refer to the supplied installation instructions to guide you through the installation process. Before you commence installation, refer to the Components List within the instructions along with the list of tools required to execute the installation.

We highly recommend that you cover the shower base area with a protective cloth through-out the installation process to avoid damage to your shower base.

Components List

Tools Required

- Level
- Drill
- Mallet
- Silicone & Silicone gun
- Pencil
- Screw driver
- Tape measure
- Chisel
- Stanley Knife
- Drill bit 3.2mm & 6mm

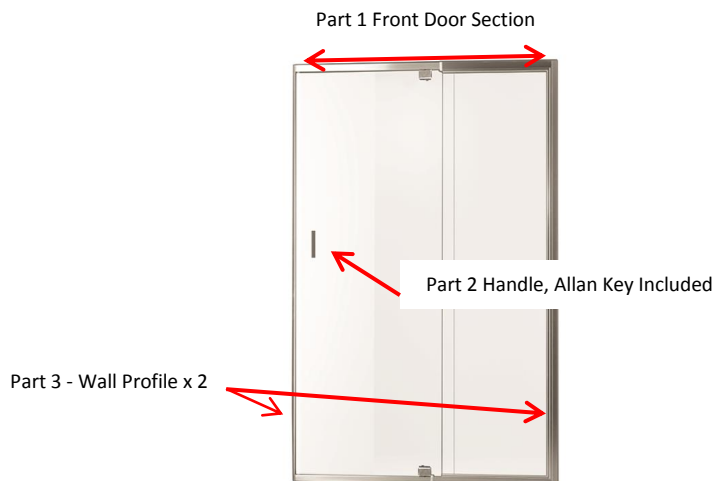

Image

Description



ST4X10 Screw Cover Caps
(Not provided when Pop Rivets are supplied instead of Screws)




ST4X10 Screws



ST4X30 Screws



Wall Plugs



Front Wall Profile Cover Cap



Bottom Horizontal Water Seals
(1 Large & 1 Small for bottom of door either side of pivot block)

Step 1 Level and Measure

- a) Place a cloth down to protect your base.
- b) Ensure that installation occurs with a level base or shower area.
- c) Measure and Mark your Base or Shower area by referring to your minimum and maximum measurements, ensuring that your selected screen will fit within the desired area. The Minimum and maximum measurement for this shower is as follows

Min and max Measurements

M5 790 Front width adjusts: 730 – 790mm

M5 890 Front width adjusts: 830 – 890mm

M5 990 Front width adjusts: 930 – 990mm

M5 1180 Front width adjusts: 1120 – 1180mm

M5 1480 Front width adjusts: 1420 – 1480mm

NOTE: When using minimum measurement, make sure you allow for walls that are out of plumb. If your walls are leaning forward by 10mm, you must reduce your screen size area by this amount.

Step 2 Mark, Drill and Fix wall Profile

- a) With a level, position **Part 3 wall profile** against wall at desired measurement, within min and max measured area. **5mm in from front edge of base.**
- b) With a pencil, mark the pre drilled holes inside of **Part 3 wall profile**. Remove wall profile and drill 6mm hole. (Use a masonry drill bit if drilling into tiles).
- c) Insert Wall plugs provided.
- d) With **Screws ST4*30** provided, fix **Part 3 wall profile** to wall ensuring wall profile is level and fixed tightly.
- e) Repeat process 1a – 1d with 2nd wall profile in the adjacent position.

Note: Wall profile must be Level and set inside of tile flange of base or within min and max measurements.

Step 3 Position and fix Front section

- a) Remove Screws at top and bottom of telescopic Junction on front door section. This will allow sliding adjustment of telescopic junction.

- b) **Note: Door is reversible, rotate door 180* degrees to open door in other direction. Door must open outwards for safety purposes.**
- c) Insert **Part 1 front door section** into **Part 3 wall profile** and fix by drilling 4 equally spaced 3.3mm holes on the internal side of screen and secure with pop rivets/Screws provided.
- d) Adjust width of door by sliding telescopic junction in or out to suit required measurement.
Fitting into both wall profiles neatly
- e) Secure bottom telescopic junction by drilling a 3.3mm hole internal of screen and fix with pop rivet or screw supplied. Level and secure top with same method. Ensuring that door functions correctly. Adjust if necessary.
- f) Fix **Part 1 Front door section** to the adjacent **Part 3 wall profile**. By drilling 4 equally spaced 3.3mm holes on the internal side of screen and secure with pop rivets/Screws provided.

Step 6 Attaching Handles

- a) Separate **Part 2 handle** using supplied Allan Key
- b) Insert screws through plastic washer then through glass, add the plastic sleeve then add other plastic washer and screw into handle.
- c) Tighten screws
- d) Attach the opposing handle with supplied Allan Key

Note: Ensure that the plastic washers are inserted correctly avoiding metal and glass making contact. Failure to do so will void your warranty and may cause glass to break.

Step 7 Attaching water seal and cover caps

- a) Attach **bottom Horizontal water seals** to bottom of **Part 1 Glass door front section** using hand pressure
- b) If screws provided; press on with thumb pressure, all screw cover caps. (This step not required if pop rivets supplied instead of screws.
- c) Attach **wall profile cover caps** to the top of the **wall profiles**.

Step 8 Sealing

- a) Using recommended bathroom purpose silicone. Apply a fine bead of silicone vertically and horizontally on the outside perimeter of screen only, sealing your shower screen. This will prevent water from leaking out of screen and will allow water to effectively drain back towards outlet. Do not use shower for 24 hours allowing for silicone to set.

Do not use silicone internal of screen. Doing so will void warranty.

Rick McLean's Designer Shower Screens (Aust) Pty Ltd

Trading as Rick McLean's Designer Bathware

WARRANTY

- Measured & Installed Products

Rick McLean's Designer Bathware will provide a 2 year Service Warranty on installation and componentry of measured & fitted Shower Screens, Mirrors & Sliding Robe Doors. Cracked, smashed or broken Glass, Splashbacks and Mirrors are NOT included. Warranty does not cover glass. Replacement glass is covered by the customer's house & contents insurance policy (if applicable) or at the customer's own expense.

- Supply Only Products

Rick McLean's Designer Bathware will provide a 2 year Warranty on our supply only products. Warranty does not cover glass. Replacement glass is covered by the customer's house & contents insurance policy (if applicable) or at the customer's own expense.

Rick McLean's Designer Bathware will supply a replacement product where faulty manufacture or faulty materials exists, only in accordance with correct installation procedure.

This warranty DOES NOT apply to other defects which may have arisen as a result of; accidental damage, misuse, abuse, maltreatment, wear & tear, incomplete return, abnormal stress or neglect of any kind.

This warranty DOES NOT include REMOVAL AND/OR INSTALLATION COSTS and any other associated expenses incurred, including those costs incurred from third party.

It is the responsibility of the recipient to inspect the product/s once received to ensure no transit damage has occurred, and/or missing parts or manufacturing faults are applicable.

Plumbing and Bathware products must be installed by a licensed plumber. Failure to do so will immediately void warranty.

Failure due to other causes, including the use of other than recommended installation procedures, may also void warranty.

Please ensure that plumbing and bathware products are installed in accordance with local by-laws.

Please ensure glass and fragile products are handled with care. Avoid knocks & shock to all sides of packaging when transporting.

Freestanding Baths are not designed to be installed hard up against bathroom walls. The sides of the baths taper, even if they appear to be straight edged. Installing freestanding baths up against tiled walls or recessing baths into walls and tiling down onto them is at the client's own discretion. This is not in accordance with correct installation procedure and will void warranty.

Sizes, Prices and Stock Availability of products are subject to change without notice.

Warranty does not cover glass.

Broken Glass or missing parts will not be replaced under warranty if the Shower Screen is in the process of being installed.

The safety glass featured in all Shower Screens cannot be cut, trimmed or altered in any way.

Manufactured sizes of Shower Screens, Shower Bases & Baths are nominal. Actual sizes may vary during manufacturing.

- How to make a claim for Credit or Exchange of Goods for Supply Only Products

Rick McLean's Designer Bathware will credit or exchange goods within 14 working days from time of purchase.

The customer will be deemed to have accepted the goods as being in accordance with its order unless it notifies Rick McLean's Designer Bathware of its claim within 14 days of receipt of the goods.

All returned goods will incur a 25% restocking fee on the total cost of goods.

The following conditions must be met however in order to accept returned goods:

- We have received prior notification by advising our office on 03 9331 6660 or in person
- Original tax invoice must be supplied
- Goods must still be in original condition
- Goods must still be in original packaging
- Customer is responsible for arranging return of goods and all transportation costs involved
- In the circumstance that a credit is issued, we will hold a credit for 30 days

Any goods authorised for return shall be returned at the customer's expense